

F01 Modular U-Drop



700mmW MODULAR U-TOP & U-DROP

GT U-TOP700

External Dimension (WxDxH)	700 x 50 x 165mm
Weight	1.6kg
Max. Centre point Loading	100kg

GT U-DROP700

External Dimension (WxDxH)	700 x 50 x 850mm
Internal Dimension (WxDxH)	600 x 50 x 700mm
Weight	4.1kg
Max. Centre point Loading	95kg

850mmW MODULAR U-TOP & U-DROP

GT U-TOP850

External Dimension (WxDxH)	850 x 50 x 165mm
Weight	1.8kg
Max. Centre point Loading	95kg

GT U-DROP850

External Dimension (WxDxH)	850 x 50 x 900mm
Internal Dimension (WxDxH)	750 x 50 x 800mm
Weight	4.3kg
Max. Centre point Loading	95kg


1100mmW MODULAR U-TOP & U-DROP

GT U-TOP1100

External Dimension (WxDxH)	1100 x 50 x 165mm
Weight	2.1kg
Max. Centre point Loading	93kg

GT U-DROP1100

External Dimension (WxDxH)	1100 x 50 x 1250mm
Internal Dimension (WxDxH)	1000 x 50 x 1150mm
Weight	5.7kg
Max. Centre point Loading	93kg

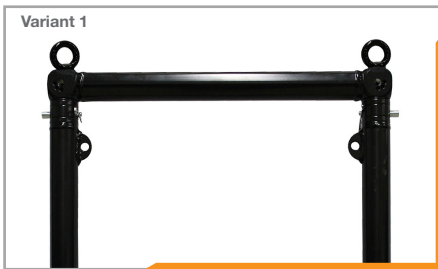

M12 Eye Bolt

DIN 580 (SWL 340kg)



GT A-CPL-FMD50/FHD50

50mmØ Medium/Heavy Duty Swivel Coupler (SWL 250kg / SWL 500kg)



GT A-CPL-HSM50-HSP/HHD50-HSP


50mmØ Medium / Heavy Duty Coupler with Half-Spigot (SWL 250kg / SWL 500kg)









Image courtesy of Elite Event Technology



Image courtesy of Cosmic Truss



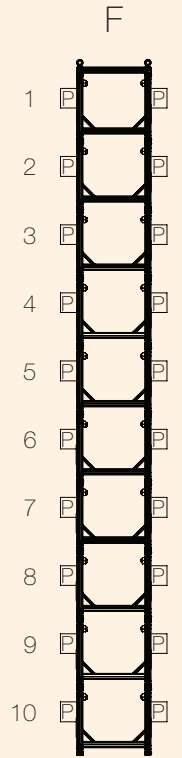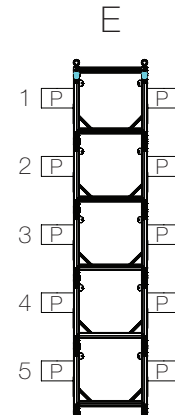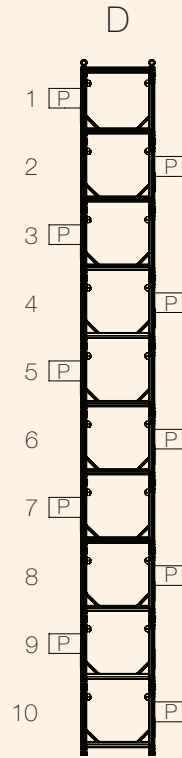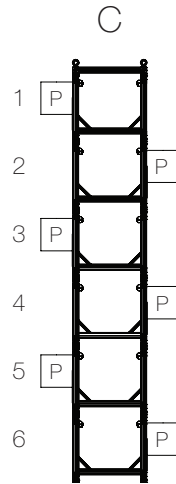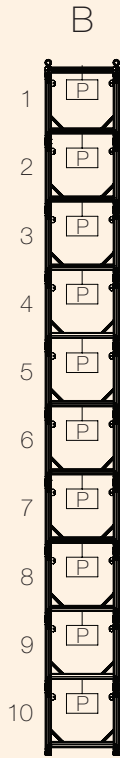

GT U-DROP700

Variant	1A
Max frames	5
P (kg) ≤	63
Variant	2A
Max frames	5
P (kg) ≤	45
Variant	3A
Max frames	5
P (kg) ≤	95

Variant	1B
Max frames	10
P (kg) ≤	29
Variant	2B
Max frames	10
P (kg) ≤	20
Variant	3B
Max frames	10
P (kg) ≤	45

Variant	1C
Max frames	6
P (kg) ≤	51
Variant	2C
Max frames	6
P (kg) ≤	36
Variant	3C
Max frames	6
P (kg) ≤	78

Variant	1D
Max frames	10
P (kg) ≤	29
Variant	2D
Max frames	10
P (kg) ≤	20
Variant	3D
Max frames	10
P (kg) ≤	45

Variant	1E
Max frames	5
P (kg) ≤	31
Variant	2E
Max frames	5
P (kg) ≤	22
Variant	3E
Max frames	5
P (kg) ≤	47

Variant	1F
Max frames	10
P (kg) ≤	14
Variant	2F
Max frames	10
P (kg) ≤	10
Variant	3F
Max frames	10
P (kg) ≤	22

GT U-DROP850

Variant	1A
Max frames	5
P (kg) ≤	62
Variant	2A
Max frames	5
P (kg) ≤	44
Variant	3A
Max frames	5
P (kg) ≤	94

Variant	1B
Max frames	10
P (kg) ≤	29
Variant	2B
Max frames	10
P (kg) ≤	20
Variant	3B
Max frames	10
P (kg) ≤	45

Variant	1C
Max frames	6
P (kg) ≤	51
Variant	2C
Max frames	6
P (kg) ≤	36
Variant	3C
Max frames	6
P (kg) ≤	78

Variant	1D
Max frames	10
P (kg) ≤	29
Variant	2D
Max frames	10
P (kg) ≤	20
Variant	3D
Max frames	10
P (kg) ≤	45

Variant	1E
Max frames	5
P (kg) ≤	31
Variant	2E
Max frames	5
P (kg) ≤	22
Variant	3E
Max frames	5
P (kg) ≤	47

Variant	1F
Max frames	10
P (kg) ≤	14
Variant	2F
Max frames	10
P (kg) ≤	10
Variant	3F
Max frames	10
P (kg) ≤	22

GT U-DROP1100

Variant	1A
Max frames	5
P (kg) ≤	61
Variant	2A
Max frames	5
P (kg) ≤	43
Variant	3A
Max frames	5
P (kg) ≤	93

Variant	1B
Max frames	10
P (kg) ≤	27
Variant	2B
Max frames	10
P (kg) ≤	18
Variant	3B
Max frames	10
P (kg) ≤	43

Variant	1C
Max frames	6
P (kg) ≤	50
Variant	2C
Max frames	6
P (kg) ≤	35
Variant	3C
Max frames	6
P (kg) ≤	76

Variant	1D
Max frames	10
P (kg) ≤	27
Variant	2D
Max frames	10
P (kg) ≤	18
Variant	3D
Max frames	10
P (kg) ≤	43

Variant	1E
Max frames	5
P (kg) ≤	30
Variant	2E
Max frames	5
P (kg) ≤	21
Variant	3E
Max frames	5
P (kg) ≤	46

Variant	1F
Max frames	10
P (kg) ≤	13
Variant	2F
Max frames	10
P (kg) ≤	9
Variant	3F
Max frames	10
P (kg) ≤	21

